



SEW
EURODRIVE



MOVIFIT[®] Function Level “Technology” with DeviceNet Interface Additional Information for Firmware Version 10

Edition 03/2009

16796411 / EN

Manual




1 Additional Information for Firmware Version 10

1.1 Other applicable documentation


- This document does not replace the detailed manual.
- Installation and startup only by trained personnel observing the relevant accident prevention regulations and the following manual:
 - "MOVIFIT® Function Level "Technology" with DeviceNet Interface" manual

1.2 Identification of firmware version 10

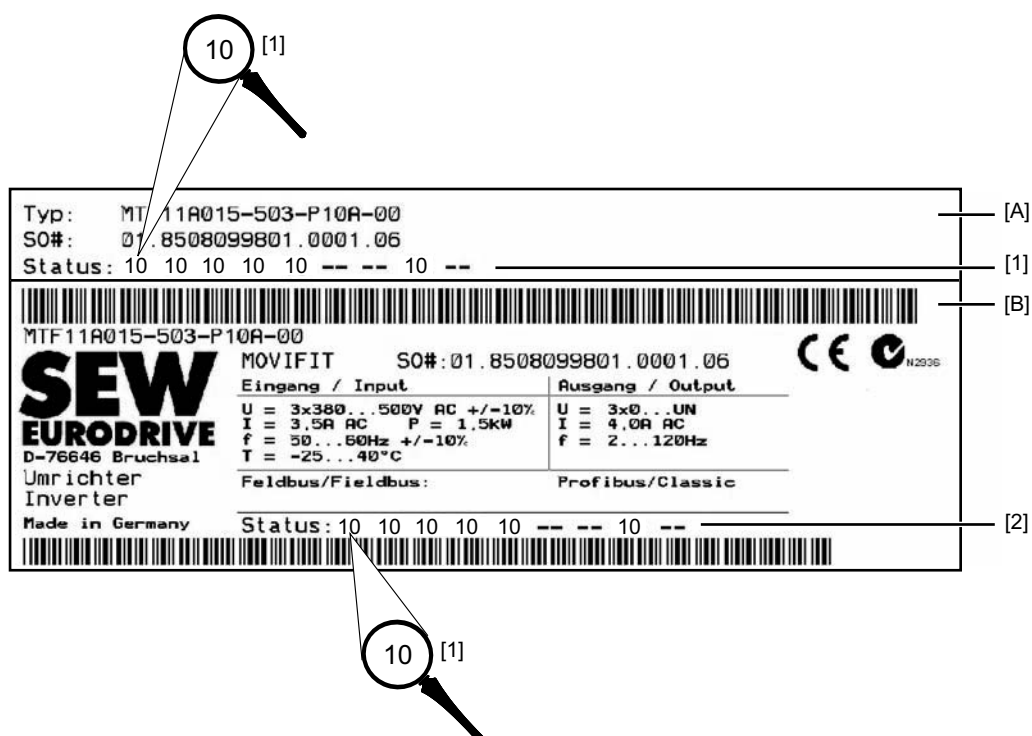

- [A] External nameplate
 [B] Internal nameplate
 [1] Firmware version 10
 [2] EBOX status field

1668875019



1.3 Changes compared to the standard firmware

Firmware version 10 of MOVIFIT® function level "Technology" provides a different functionality compared to that described in the manual mentioned above:

- The "Transparent mode" application module does not support the MOVIFIT® slave units.

None of the corresponding functions with MOVIFIT® slave units are available.

- As opposed to MOVIFIT® function level "Classic", the LEDs of MOVIFIT® function level "Technology" do not indicate the status of the communication with the lower-level devices (MOVIMOT® connected to MOVIFIT®-MC or integrated power sections in MOVIFIT®-FC or MOVIFIT®-SC).

1.4 New installation of transparent mode application module

Proceed as follows to install the transparent mode application module on the MOVIFIT® if it has been deleted:

Prerequisite:

The following software is installed on the PC:

- MOVITOOLS® MotionStudio 5.5 Complete, incl. Service Pack 3
and "Transparent mode version manager" add-in
- or MOVITOOLS® MotionStudio 5.6 Complete

1. Start the MOVITOOLS® MotionStudio software.
2. Right-click on "0: MT. ...D11A" and select [Programming] / [Version manager] from the menu.

The "Version manager" window opens.

3. Select the firmware version with gateway application and confirm by clicking on the [Next] button.
4. Click on [Next] until the function selection is displayed.
5. Activate the "Download gateway application" checkbox.
6. Click the [Finish] button.



SEW-EURODRIVE
Driving the world

SEW
EURODRIVE

SEW-EURODRIVE GmbH & Co KG
P.O. Box 3023
D-76642 Bruchsal/Germany
Phone +49 7251 75-0
Fax +49 7251 75-1970
sew@sew-eurodrive.com

→ www.sew-eurodrive.com