



SEW
EURODRIVE

SEW-EURODRIVE GmbH & Co KG

P.O. Box 3023

D-76642 Bruchsal/Germany

Phone +49 7251 75-0

Fax +49 7251 75-1970


sew@sew-eurodrive.com

→ www.sew-eurodrive.com

Addendum to the Manual

MOVIFIT® MC / FC

Functional Safety

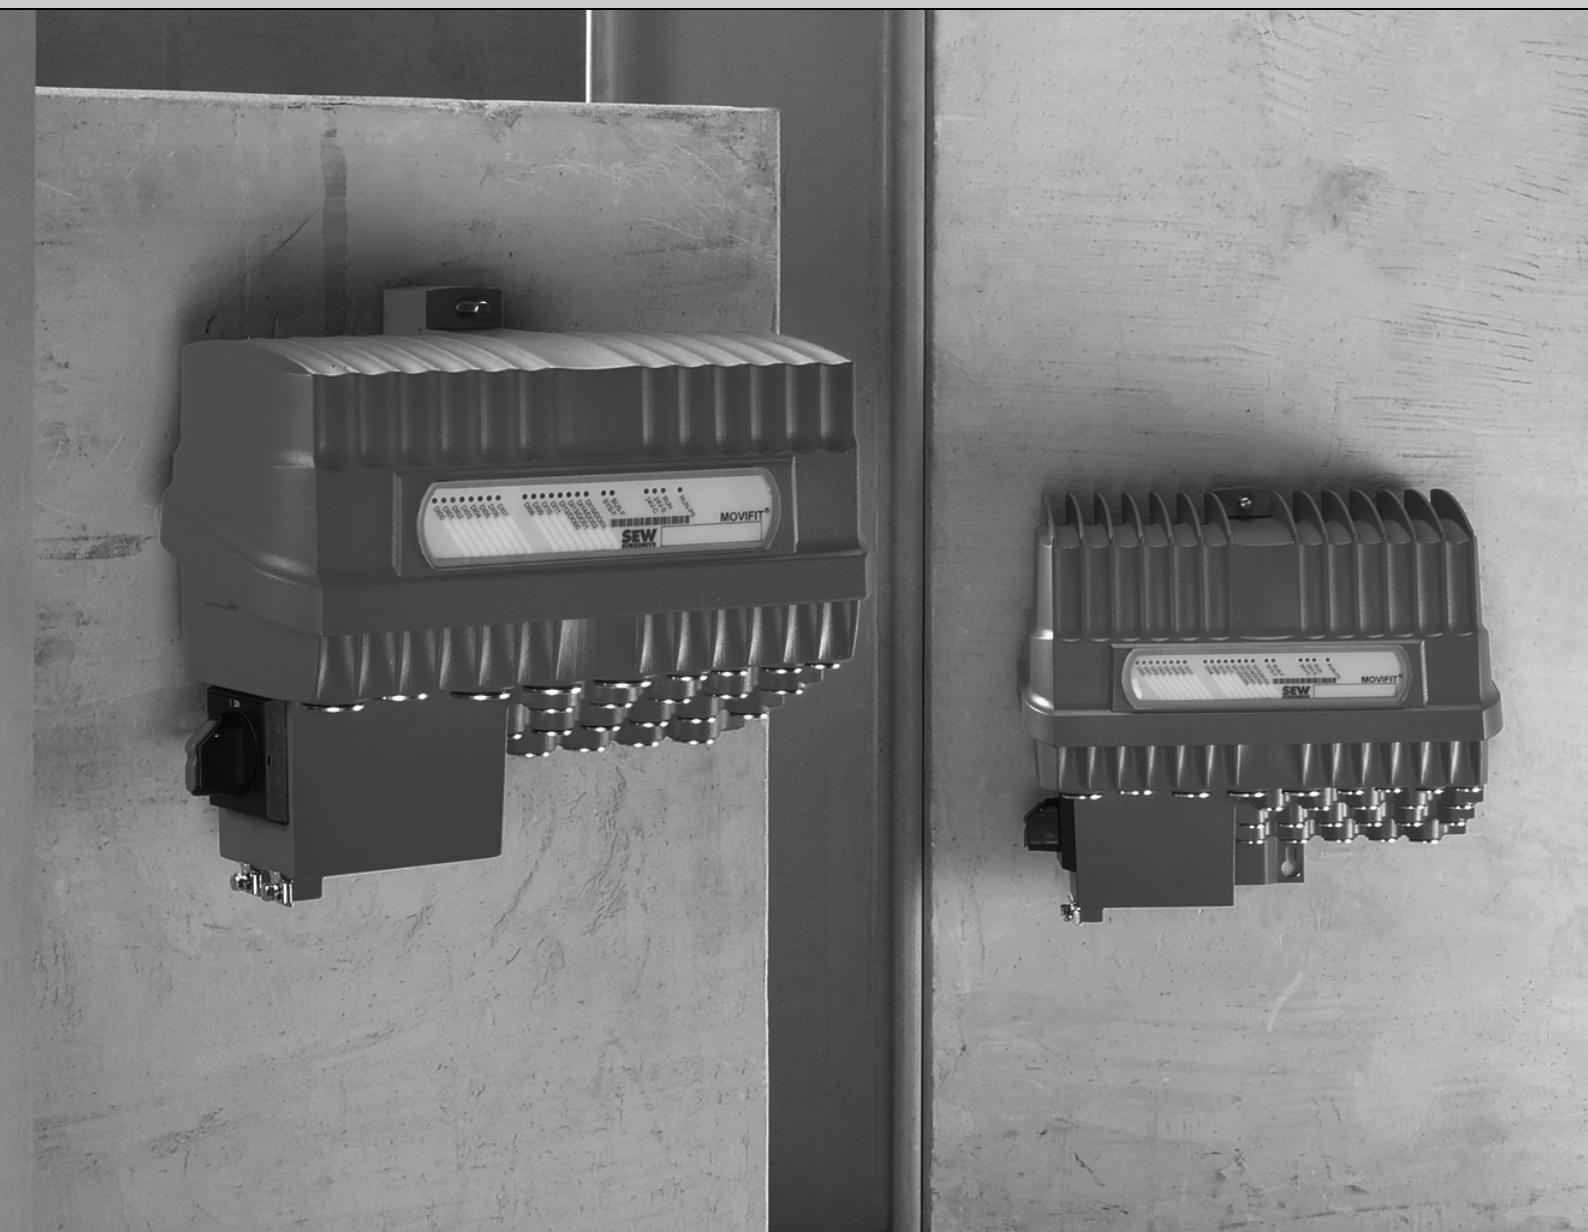

MOVIFIT® MC / FC – Functional Safety
MOVIFIT® Hybrid ABOX



Addendum

Amendment for permitted MOVIFIT® ABOX units

1 Addendum



INFORMATION

This document lists amendments made to the "MOVIFIT® MC/FC – Functional Safety" manual, part number 19300417, edition 07/2011. Please use the data specified in this document. The addendum does not replace the detailed manual.

1.1 Amendment for permitted MOVIFIT® ABOX units

1.1.1 MOVIFIT® MC

The following ABOX is permitted for MOVIFIT® MC applications in connection with functional safety:

- Hybrid ABOX **MTA11A-503-A113-M15-06**

This ABOX is permitted for use in MOVIFIT® MC applications with safe disconnection of the drive according to stop category 0 or 1 in accordance with EN 60204-1, fail-safe protection against restart according to EN 1037, and fulfillment of performance level "d" according to EN ISO 13849-1.

1.1.2 MOVIFIT® FC

The following ABOXes are permitted for MOVIFIT® FC applications in connection with functional safety:

- Hybrid ABOX **MTA11A-503-S422-04 / M2A**
- Hybrid ABOX **MTA11A-503-S523-04 / M2A**
- Hybrid ABOX **MTA11A-503-I451-D01-08**

The ABOXes are permitted for MOVIFIT® FC applications with safe disconnection of the drive according to stop category 0 or 1 in accordance with EN 60204-1, fail-safe protection against restart according to EN1037, and fulfillment of performance level "d" according to EN ISO 13849-1.