

Basic, cost-effective motor control in one unit:
MOVITRAC® 07.

Frequency inverter



Small but smart

MOVITRAC® 07 – first choice when it comes to doing things quickly and easily. All the essential features and functions for uncomplicated, cost-effective motor control are combined in the MOVITRAC® 07, making it just as effective and reliable as any of its bigger relatives. And best of all, it can be started up and operated in the simplest way.

MOVITRAC® 07 was conceived for simple applications in conveyor or metering systems, in agitators, ventilators or pumps, in rotary tables or roller conveyors and many more. This convincing concept makes the MOVITRAC® 07 a particularly interesting and economical choice for such applications.

MOVITRAC® 07 is available in many sizes – compact and cost-effective for basic motor control



Driving the world: with innovative drive solutions for all branches of industry and for each application. Products and systems from SEW-EURODRIVE for any application, worldwide! SEW-EURODRIVE products can be found in a variety of industries, e.g. automotive, building materials, food and beverage as well as metal-processing. The decision to use drive technology "made by SEW-EURODRIVE" stands for safety regarding functionality and investment.





MOVITRAC® 07 – electronic drive control made easy

The answer to market requirements for a compact frequency inverter with comprehensive functionality: MOVITRAC® 07

MOVITRAC® 07 with its compact design saves installment space in the switch cabinet. Standard integration of brake chopper and EMC input filter in Class B or A. As an option, the braking resistor can be installed in the basic unit.

MOVITRAC® 07 is particularly user-friendly. The integrated keypad comprises easy-to-understand function symbols and keys. Unit startup is a very straightforward matter based on the “Plug-and-Play” principle. The user-friendly menu and automatic motor adjustment makes startup fast and simple. In addition, a setpoint potentiometer is integrated, making manual speed adjustment possible as well.



Space-saving installment – MOVITRAC® 07, the compact frequency inverter




MOVITRAC® 07 – the small but smart inverter, particularly economical and easy to operate. The compact design saves installment space in the switch cabinet. The wide range of functions serves a broad range of applications.



Making startup as easy as possible

With the integrated keypad you are ready to start in next to no time – simply enter the rated electrical data for the drive, and the MOVITRAC® 07 is ready for operation. For further ease of operation and for diagnosis of status messages, the MOVITOOLS software comes free of charge.

Not only user-friendly installation, but also the MOVITRAC® 07 connection technology has been a focal point for our engineers. The EMC-compliant wiring of the motor and control leads is optimally protected by the integrated shield connections.

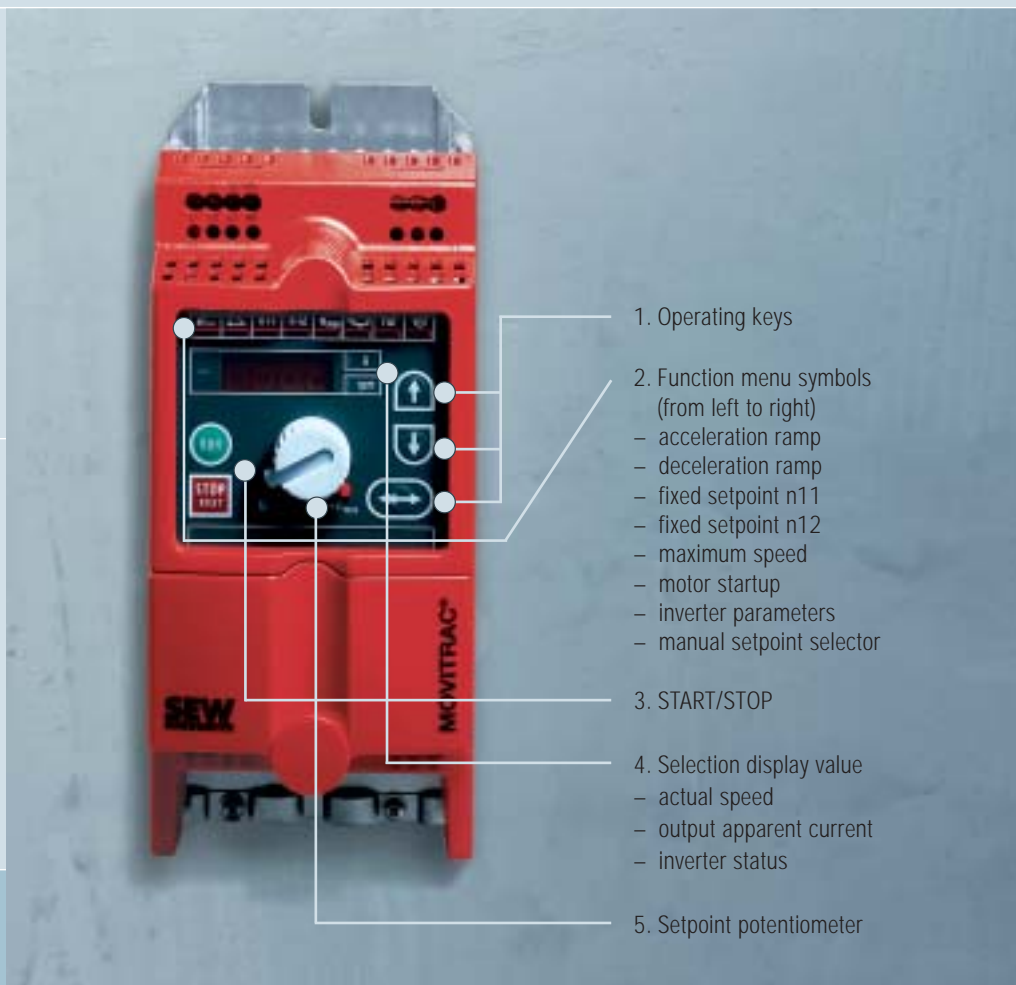

All the parameters for the MOVITRAC® 07 can be entered quickly and simply with the integrated keypad. Parameters that are frequently used can be selected directly from the functions menu.

1. Operating keys
2. Function menu symbols (from left to right)
 - acceleration ramp
 - deceleration ramp
 - fixed setpoint n11
 - fixed setpoint n12
 - maximum speed
 - motor startup
 - inverter parameters
 - manual setpoint selector
3. START/STOP
4. Selection display value
 - actual speed
 - output apparent current
 - inverter status
5. Setpoint potentiometer



MOVITRAC® 07 convinces with a comprehensive and sophisticated unit concept:
Simple, quick and easy to operate startup ensures complete functionality and safety of the system.

MOVITRAC® 07 offers a full range of functions for a broad spectrum of applications

The UBP11A parameter module offers **additional functionality and safety**. It serves as an external parameter memory to not only save parameter data but copy existing parameter sets to other frequency inverters. The parameter module is equipped with only two function keys, which makes for convenient operation. All operating states are displayed via LED. Even the storage of the module has been carefully planned out: You simply snap it into a receptacle on the front of the frequency inverter.

The MOVITRAC® 07 can be operated in **both standard V/f control mode or field-oriented VFC (no encoder)**. High overload capacity, integrated protection and monitoring functions and an extended temperature range are also standard features. An evaluation unit for the motor temperature sensor integrated into the MOVITRAC® 07 provides optimum motor protection. Not only that, the PI controller, installed as a standard, allows independent regulation of process variables such as flow and pressure.



UBP11A parameter module for convenient data transfer and fast data backup

Operation of up to 8 MOVITRAC®, 07 units via **one fieldbus gateway**:

Unit concept:

- External fieldbus gateway (Fieldbus → SBus)
- IP20 control cabinet

Unit designs:

- UFP11A → PROFIBUS
- UFD11A → DeviceNet
- UFI11A → INTERBUS
- UFO11A → CANopen

Optional DIN rail mounting



Complete functionality – in a compact package: MOVITRAC® 07 technical data

3phase system 400 V_{AC} / 0.55 ... 4.0 kW



MOVITRAC® 07 Type	MC07A-005	MC07A-008	MC07A-011	MC07A-015	MC07A-022	MC07A-030	MC07A-040
Supply voltage [V]	3 x 380 ... 500 ± 10 % for 50 ... 60 Hz ± 5 %						
Output frequency [Hz]	0 ... 400						
Recommended motor power [kW] with overload reserve 1,5 x I _N Output rated current [A] 400 V	0.55	0.75	1.1	1.5	2.2	3.0	4.0
Recommended motor power [kW] without overload reserve Output rated current [A] 400 V	0.75	1.1	1.5	2.2	3.0	4.0	5.5
EMV measures	Integrated input filter A (EN 55011)						
Main dimensions in mm (in) W x H x D	90 x 245 x 150 (3.5 x 9.6 x 5.9)			90 x 295 x 150 (3.5 x 11.6 x 5.9)			
Size	0M			0L			

3phase system 400 V_{AC} / 5.5 ... 30.0 kW



MOVITRAC® 07 Type	MC07A-055	MC07A-075	MC07A-110	MC07A-150	MC07A-220	MC07A-300
Supply voltage [V]	3 x 380 ... 500 ± 10 % for 50 ... 60 Hz ± 5 %					
Output frequency [Hz]	0 ... 400					
Recommended motor power [kW] with overload reserve 1,5 x I _N Output rated current [A] 400 V	5.5	7.5	11.0	15.0	22.0	30.0
Recommended motor power [kW] without overload reserve Output rated current [A] 400 V	7.5	11.0	15.0	22.0	30.0	37.0
EMV measures	Integrated input filter A (EN 55011)			–	–	–
Main dimensions in mm (in) W x H x D	105 x 335 x 205 (4.1 x 13.2 x 8.1)		130 x 335 x 196 (5.1 x 13.2 7.7)	200 x 465 x 218 (7.9 x 18.3 x 8.6)		
Size	2S		2	3		

3phase system 400 V_{AC} / 37.0 ... 45.0 kW



MOVITRAC® Type	MC07A-370	MC07A-450
Supply voltage [V]	3 x 380 ... 500 ± 10 % for 50 ... 60 Hz ± 5 %	
Output frequency [Hz]	0 ... 400	
Recommended motor power [kW] with overload reserve 1,5 x I _N Output rated current [A] 400 V	37.0 73.0	45.0 89.0
Recommended motor power [kW] without overload reserve Output rated current [A] 400 V	45.0 91.0	55.0 111.0
EMV measures	–	
Main dimensions in mm (in) W x H x D	280 x 522 x 222 (11.0 x 20.6 x 8.7)	
Size	4	

1phase system 230 V_{AC} / 0.37 ... 2.2 kW



MOVITRAC® 07 Type	MC07A-004	MC07A-005	MC07A-008	MC07A-011	MC07A-015	MC07A-022
Supply voltage [V]	1 x 200 ... 240 ± 10 % for 50 ... 60 Hz ± 5 %					
Output frequency [Hz]	0 ... 400					
Recommended motor power [kW] with overload reserve 1,5 x I _n Output rated current [A] 230 V	0.37 2.5	0.55 3.3	0.75 4.2	1.1 5.7	1.5 7.3	2.2 8.6
Recommended motor power [kW] without overload reserve Output rated current [A] 230 V	0.55 3.1	0.75 4.1	1.1 5.3	1.5 7.1	2.2 9.1	3.0 10.8
EMV measures	Integrated input filter B (EN 55011)					
Main dimensions in mm (in) W x H x D	90 x 185 x 150 (3.5 x 7.2 x 5.9)			90 x 295 x 150 (3.5 x 11.6 x 5.9)		
Size	0S			0L		

3phase system 230 V_{AC} / 0.37 ... 2.2 kW



MOVITRAC® 07 Type	MC07A-004	MC07A-005	MC07A-008	MC07A-011	MC07A-015	MC07A-022
Supply voltage [V]	3 x 200 ... 240 ± 10 % for 50 ... 60 Hz ± 5 %					
Output frequency [Hz]	0 ... 400					
Recommended motor power [kW] with overload reserve 1,5 x I _n Output rated current [A] 230 V	0.37 2.5	0.55 3.3	0.75 4.2	1.1 5.7	1.5 7.3	2.2 8.6
Recommended motor power [kW] without overload reserve Output rated current [A] 230 V	0.55 3.1	0.75 4.1	1.1 5.3	1.5 7.1	2.2 9.1	3.0 10.8
EMV measures	Integrated input filter A (EN 55011)					
Main dimensions in mm (in) W x H x D	90 x 185 x 150 (3.5 x 7.2 x 5.9)			90 x 295 x 150 (3.5 x 11.6 x 5.9)		
Size	0S			0L		

3phase system 230 V_{AC} / 3.7 ... 30.0 kW



MOVITRAC® 07 Typ	MC07A-037	MC07A-055	MC07A-075	MC07A-110	MC07A-150	MC07A-220	MC07A-300
Supply voltage [V]	3 x 200 ... 240 ± 10 % for 50 ... 60 Hz ± 5 %						
Output frequency [Hz]	0 ... 400						
Recommended motor power [kW] with overload reserve 1,5 x I _n Output rated current [A] 230 V	3.7 14.5	5.5 22.0	7.5 29.0	11.0 42.0	15.0 54.0	22.0 80.0	30.0 95.0
Recommended motor power [kW] without overload reserve Output rated current [A] 230 V	5.5 18.1	7.5 27.5	11.0 36.3	15.0 52.5	22.0 67.5	30.0 100.0	37.0 118.8
EMV measures	Integrated input filter A (EN 55011)			–	–	–	–
Main dimensions in mm (in) W x H x D	105 x 315 x 144 (4.1 x 12.4 5.7)	130 x 335 x 196 (5.1 x 13.2 x 7.7)		200 x 465 x 218 (7.9 x 18.3 x 8.6)		280 x 522 x 222 (11.0 x 20.6 x 8.7)	
Size	1	2		3		4	

How to drive the world

With people who think right faster and develop the future with you.

With a service network that is always close at hand around the world.

With drives and controls that automatically improve your work performance.

With a comprehensive knowledge in the most important branches of industry today.

With uncompromising quality whose high standards will simplify daily operations.



With a global presence for quick and convincing solution. Anywhere.

With innovative ideas that offers a solution for tomorrow's problems today.

With an Internet presence that is available around the clock and offers information as well as software updates.

SEW-EURODRIVE
Driving the world

SEW-EURODRIVE is right there for you:

Argentina
Tel. 03327 457284
Fax 03327 457221
sewar@sew-eurodrive.com.ar

Australia
Tel. 03 99331000
Fax 03 99331003
enquires@
sew-eurodrive.com.au

Austria
Tel. 01 6175500-0
Fax 01 6175500-30
sew@sew-eurodrive.at

Belgium
Tel. 010 231311
Fax 010 231336
info@caron-vector.be

Brazil
Tel. 011 64899133
Fax 011 64803328
sew@sew.com.br

Canada
Tel. 905 791-1553
Fax 905 791-2999
sew@sew.eurodrive.ca

Chile
Tel. 02 7577000
Fax 02 7577001
sewsales@entelchile.net

China
Tel. 022 25322612
Fax 022 25322611
sa@sew.com.cn

Colombia
Tel. 0571 5475050
Fax 0571 5475044
sewcol@andinet.com.

Czech Republic
Tel. 02 2012123436
Fax 02 20121237
sew@sew-eurodrive.cz

Denmark
Tel. 043 958500
Fax 043 958509
sew@sew-eurodrive.dk

Finland
Tel. 3 589300
Fax 3 7806211
sew@sew-eurodrive.fi

France
Tel. 0388736700
Fax 0388736600
sew@usocome.com

Great Britain
Tel. 1924893855
Fax 1924893702
info@sew-eurodrive.co.uk

Hong Kong
Tel. 2-796-0477
Fax 2-795-9129
sew@sewhk.com

Hungary
Tel. 01 4370658
Fax 01 4370650
sew-eurodrive.voros@
matarnet.hu

India
Tel. 0265 2831021
Fax 0265 2831087
sew.baroda@gecsl.com

Italy
Tel. 02-96980-1
Fax 02-96799781
sewit@sew-eurodrive.it

Japan
Tel. 05383 73811-13
Fax 05383 73814
sewjapan@
sew-eurodrive.co.jp

Malaysia
Tel. 07 3545707
Fax 07 3541404
kchtan@pd.jaring.my

Mexico
Tel. 5 8882976
Fax 5 8882977
scmexico@
seweurodrive.com.mx

Netherlands
Tel. 010 4463700
Fax 010 4155552
info@vector.nu

New Zealand
Tel. 09 2745627
Fax 09 2740165
sales@sew-eurodrive.co.nz

Norway
Tel. 69 241020
Fax 69 241040
sew@sew-eurodrive.no

Peru
Tel. 511 349-5280
Fax 511 349-3002
sewperu@terra.com.pe

Poland
Tel. 042 6771090
Fax 042 6771099
sew@sew-eurodrive.pl

Portugal
Tel. 0231 209670
Fax 0231 203685
infosew@sew-eurodrive.pt

Russia
Tel. 812 5350430
Fax 812 5352287
sew@sew-eurodrive.ru

Singapore
Tel. 68621701-705
Fax 8612827
sales@sew-eurodrive.com.sg

South Africa
Tel. 011 2487000
Fax 011 4942311
ljansen@sew.co.za

South Korea
Tel. 031 492-8051
Fax 031 492-8056
master@sew-korea.co.kr

Spain
Tel. 944318470
Fax 944318471
sew.spain@sew-eurodrive.es

Sweden
Tel. 036 344200
Fax 036 344280
info@sew-eurodrive.se

Switzerland
Tel. 061 4171717
Fax 061 4171700
info@imhof-sew.ch

Thailand
Tel. 038 454281
Fax 038 454288
sewthailand@sew-eurodrive.co.th

Turkey
Tel. 216 4419163
Fax 216 3055867
seweurodrive@superonline.com.tr

USA
Tel. 864 439-737
Fax 864 439-7830
cslyman@seweurodrive.com

Venezuela
Tel. 241 8329804
Fax 241 8386275
sewventas@cantv.net

**SEW
EURODRIVE**

SEW-EURODRIVE GmbH & Co KG
P.O. Box 30 23 · D-76642 Bruchsal/Germany
Phone +49 7251 75-0 · Fax +49 7251 75-1970
sew@sew-eurodrive.com

→ www.sew-eurodrive.com